
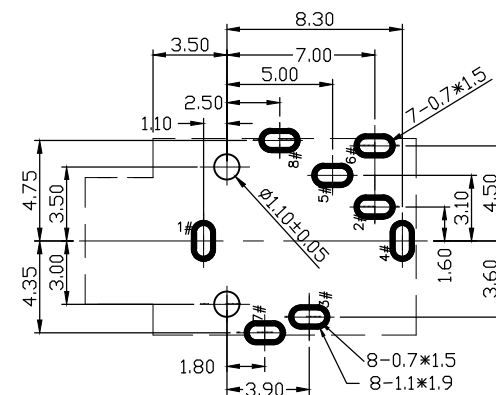


1. Rating : DC 30V 1A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.
7. Halogen Free COMPLIANT

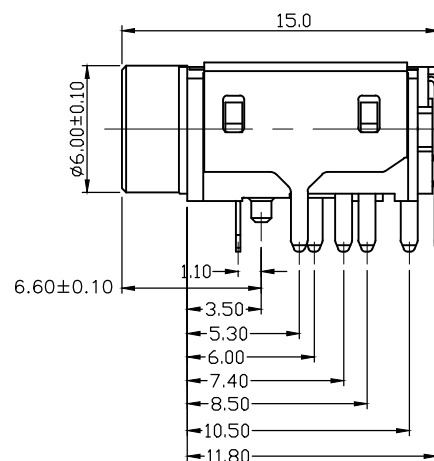

P.C.B LAYOUT TOP VIEW



DIM	DEG	JOINSOO建舜電子			
"	±8'	FILE: DRAW NO. P/N: 12RJ-K06B-Y906PR UNIT: mm SCALE: 1:1 REV: 02 SHEET: 1/2		DRAW NAME: ø3.5mm PHONE JACK MODEL:	
"	±5'				
"	±3'				
"	±2'				
2020.02.18					

DIM	TOL	DIM	DEG
X	±0.50	X°	±8°
X.X	±0.35	X.X°	±5°
X.XX	±0.25	X.XX°	±3°
X.XXX	±0.15	X.XXX°	±2°
DESIGN:	YIN	2020.02.18	
CHECK:			
APPROVED			

JOINSOO建舜電子

FILE:	DRAW NAME: <i>ø3.5mm PHONE JACK</i>
DRAW NO.	

UNIT: <i>mm</i>	SCALE: <i>1:1</i>	MODEL:	
REV: <i>02</i>	SHEET: <i>1/2</i>		

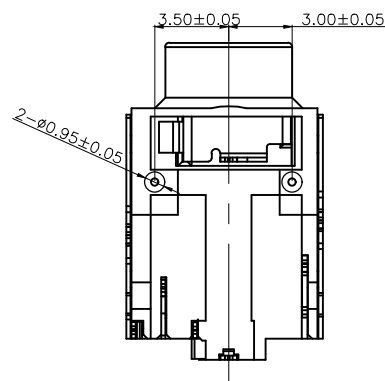


C-DWG

FLANGE CORE DIAMETER ($\phi 100$)AROUND THE OUTER PERIPHERY
IN A TURN.
WEEDING THE COVER TAPE

165°~180° PEELING ANGLE.

WITHOUT
CHARGE
(300mm)
APPROX

NO SCALE

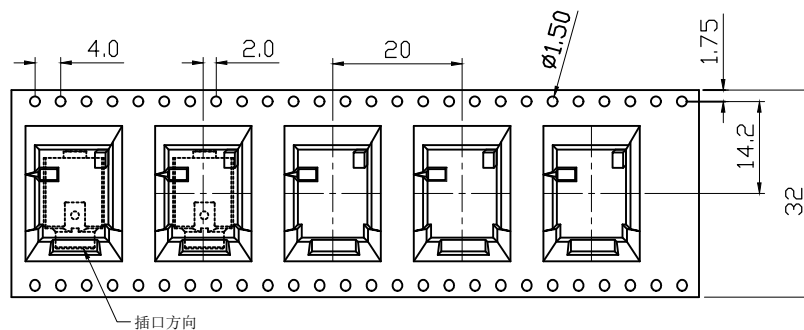WITH PRODUCT CHARGE
(300mm)
APPROX

- NOTES :
- PACKAGING MATERIAL IN PLASTIC, RUBBER, INK, PIGMENT AND PAINT MUST MEET CONTROLLED SUBSTANCES SPEC PER 230-702.
 - * CADMIUM AND CADMIUM COMPOUNDS NOT TO EXCEED: 5 PPM.
 - * LEAD, CADMIUM, CHROM VI AND MERCURY NOT TO EXCEED: 100 PPM (COMBINED).
 - * CARRIER TAPES, COVER TAPES, REELS AND TAPED COMPONENTS MUST MEET THE REQUIREMENTS DEFINED PER EIA-481-B.

1. MATERIAL :
- COVER TAPE : PET
 - CARRIER TAPE : PS
 - REEL : PS
 - SHIPPING BOX: CORRUGATED FIBER

2. DIMENSION :
- REEL : SEE DRAWING
 - BOX : SEE DRAWING


3. QUANTITY : SEE TABLE

4. WEIGHT : SEE TABLE

5. PEELING RESISTANCE : 10gf~100gf (for 8mm)

6. PEELING SPEED : 300mm/MINUTES

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
01	--	NEW DRAWING	2019.08.20	YIN
02	--	ADD D/C	2020.02.18	YIN

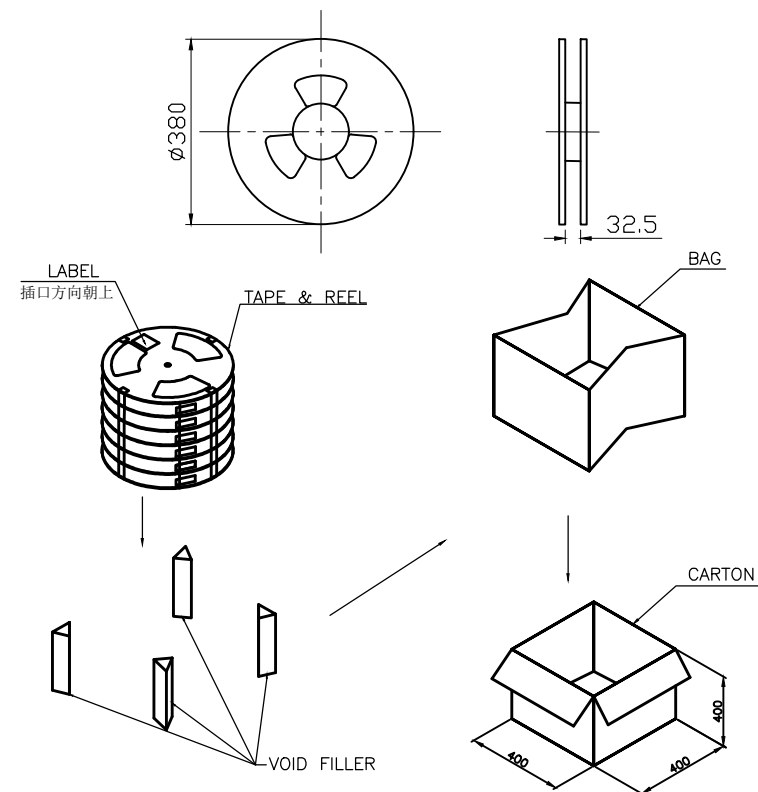

QUANTITY:
500 PCS/REEL
10 REELS/INNER BOX: 5000PCS

DIM	TOL	DIM	DEG	JOINSOO建舜電子		
X	±0.50	X°	±8°	FILE: DRAW NAME: DRAW NO. P/N: 12RJ-K06B-Y906PR UNIT: mm SCALE: 1:1 REV: 02 SHEET: 2/2 MODEL: 		
X.X	±0.35	X.X°	±5°			
X.XX	±0.25	X.XX°	±3°			
X.XXX	±0.15	X.XXX°	±2°			
DESIGN:	YIN	2020.02.18				
CHECK:						
APPROVED						